


Intel[®] XScale IXP420/422/425 Network Processor



Features

- Intel[®] XScale IXP420/422/425 Network Processor
- MontaVista Linux Pre-installed In Onboard Flash Memory, No License Fee Required
- 2 WAN Ports/ 4 LAN Ports
- 2 COM/ 2 USB 2.0 Host
- Supports 2 Type III Mini PCI Slots
- JTAG Port For Debug Tools
- +9V to +24V Input

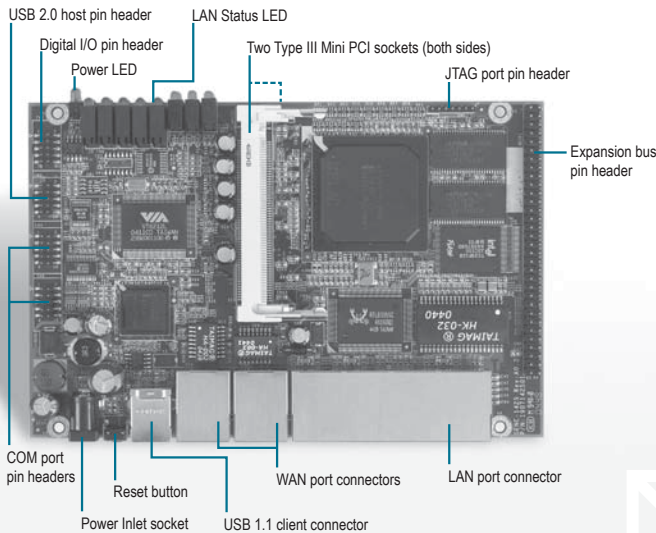

Specifications

System	
Processor	Onboard Intel [®] XScale IXP420/422/425 266/533MHz Network Processor
System Memory	Onboard 32/64MB SDRAM
Ethernet	Realtek RTL8305SC for one WAN port and four LAN ports Intel [®] 8251QM for an additional WAN port 10/100Base-TX RJ-45 connector x 6
Boot Loader	RedBoot
Watchdog Timer	Generates a time-out system reset, setting via software
SSD	Intel [®] StrataFlash 16MB
Expansion Interface	Type III Mini PCI socket x 2, Expansion bus
Power Requirement	+9V ~ +24V
Board Size	6.14"(L) x 4"(W) (156mm x 101.6mm)
Gross Weight	0.88lb (0.4kg)
Operating Temperature	32°F~ 140°F (0°C ~ 60°C)
I/O	
MIO	RS-232 x 2 (COM1: full modem control signals, COM2: Tx,Rx,CTS,RTS only)
USB	One 5x2 pin header supports 2 USB 2.0 host ports. One USB Type B connector supports USB 1.1 client port
Digital I/O	Supports 4 in & 4 out

Packing List

- **1757902000**
+12V Output Power Adapter
- **1701100207 x 2**
2 COM Port Cables
- **1709100201**
USB Cable
- **Null Modem Cable**
- **Cross Over Ethernet Cable**
- **Quick Installation Guide**
- **Utility CD**
- **GENE-1425**

Ordering Information

- **TF-GENE-1425-A10**
RISC, IXP420, 32MB RAM, 4 LAN, 2 WAN, 2 COM, USB 2.0, 16MB Flash, CF, 2M-PCI, Rev. A1.0